

ISO 7388-1	DIN 69871	Form AD/AF	G 2.5 25000 min <sup>-1</sup>			HSC
------------	-----------	------------	-------------------------------	---	---	-----

### PRODUCT DESCRIPTION


- » Slim design
- » With integrated length adjustment screw
- » High clamping forces
- » Temperature resistance up to 120 °C
- » Optimal workpiece surfaces and longer service lives thanks to very good damping properties
- » With Balluff chip hole

### APPLICATION

- » For clamping tools with cylindrical shank and h6 shank tolerance
- » Use in combination with reduction sleeve enables flexible clamping
- » For drilling, reaming and milling

### INCLUDED IN THE DELIVERY

- » Includes built-in length adjustment screw, user guide and hexagon key

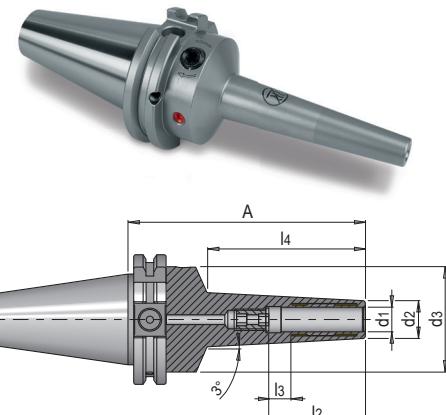

d2	d3	l2	l3	l4	Interface	d1	A	No.	#CU#
10	49.5	28	12	80	SK 40	4	120	HWZ 2266/SK40/ 4/120	XX,YY
12	49.5	37	10	80	SK 40	6	120	HWZ 2266/SK40/ 6/120	XX,YY
14	49.5	37	10	80	SK 40	8	120	HWZ 2266/SK40/ 8/120	XX,YY
16	49.5	41	10	81	SK 40	10	120	HWZ 2266/SK40/10/120	XX,YY
18	49.5	46	10	82	SK 40	12	120	HWZ 2266/SK40/12/120	XX,YY