



## PRODUCT DESCRIPTION

- » Flexible bond
- » Dimensionally stable
- » High resistance to fracture
- » For deep slots and crosspieces

## APPLICATION

- » Additionally use polishing oil
- » For polishing by hand, with hand filing machines or ultrasonic polishers

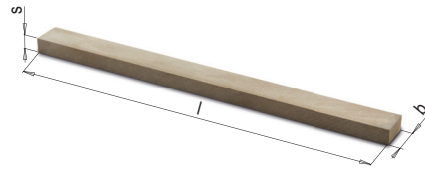

| l   | s | b  | Grit |  Pcs. / PU | No.               | EUR |
|-----|---|----|------|---|-------------------|-----|
| 150 | 3 | 6  | 220  | 12  | V 76114/ 3x 6/220 | < > |
| 150 | 3 | 6  | 320  | 12  | V 76114/ 3x 6/320 | < > |
| 150 | 3 | 6  | 400  | 12  | V 76114/ 3x 6/400 | < > |
| 150 | 3 | 6  | 600  | 12  | V 76114/ 3x 6/600 | < > |
| 150 | 6 | 6  | 320  | 12  | V 76114/ 6x 6/320 | < > |
| 150 | 6 | 6  | 400  | 12  | V 76114/ 6x 6/400 | < > |
| 150 | 6 | 6  | 600  | 12  | V 76114/ 6x 6/600 | < > |
| 150 | 3 | 13 | 220  | 12  | V 76114/ 3x13/220 | < > |
| 150 | 3 | 13 | 320  | 12  | V 76114/ 3x13/320 | < > |
| 150 | 3 | 13 | 400  | 12  | V 76114/ 3x13/400 | < > |
| 150 | 3 | 13 | 600  | 12  | V 76114/ 3x13/600 | < > |
| 150 | 6 | 13 | 320  | 12  | V 76114/ 6x13/320 | < > |
| 150 | 6 | 13 | 400  | 12  | V 76114/ 6x13/400 | < > |
| 150 | 6 | 13 | 600  | 12  | V 76114/ 6x13/600 | < > |