




PRODUCT DESCRIPTION

- » Ideal for using around machinery because of protection class IP67
- » Rapid switching from mm to inches and vice versa, in any position

INCLUDED IN THE DELIVERY

- » Certificate of calibration, a battery (CR2032) and a plastic case

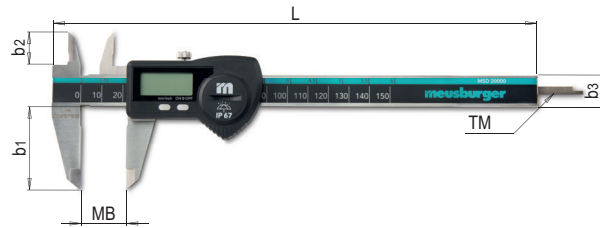

L	b1	b2	b3	Tol.	Wt.	MB ¹⁾	TM ²⁾	No.	#CU#
235	40	16	16	+/-0,03	146 g	0-150	flat	MSD 20000/150/F	XX,YY
235	40	16	16	+/-0,03	146 g	0-150	Ø 1.5 mm	MSD 20000/150/R	XX,YY
285	50	19	16	+/-0,03	194 g	0-200	flat	MSD 20000/200/F	XX,YY
388	65	19	16	+/-0,03	275 g	0-300	-	MSD 20000/300	XX,YY

1) MB: measuring range

2) TM: depth bar

Pre-calibrated