


### DESCRIZIONE DEL PRODOTTO

» Secondo DIN 6315GN

### MATERIALE

» Acciaio bonificato, laccato

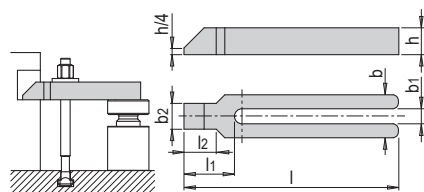

b	b2	h	l1	l2	M <sup>1)</sup>	b1	l	N°	EUR
30	16	15	32	18	M8	9	100	HWS 117/ 9/100	<>
30	20	20	38	24	M10	11	125	HWS 117/11/125	<>
40	24	25	47	30	M12, M14	14	160	HWS 117/14/160	<>
40	24	25	47	30	M12, M14	14	200	HWS 117/14/200	<>
50	28	30	57	36	M16, M18	18	200	HWS 117/18/200	<>
50	28	30	57	36	M16, M18	18	250	HWS 117/18/250	<>
60	35	40	68	45	M20, M22	22	250	HWS 117/22/250	<>
60	35	40	68	45	M20, M22	22	315	HWS 117/22/315	<>

1) M: Adatto per vite di serraggio