



DESCRIZIONE DEL PRODOTTO

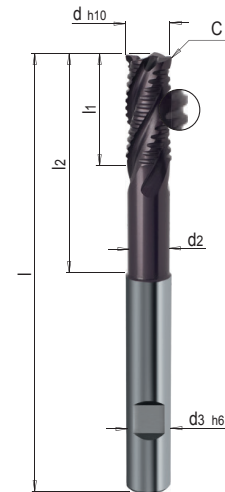
- » Fresa elicoidale ad alta prestazione con elica a passo variabile e taglio centrale
- » Scaricata dietro il tagliente

MATERIALE


» Metallo duro integrale, rivestimento multistrato TiAlN




Z	d2	d3	l	l1	l2	C	d	N°	EUR
4	5,7	6	75	13	34	0,3	6	WZF 11278/ 6	< >
4	7,7	8	100	19	50	0,3	8	WZF 11278/ 8	< >
4	9,5	10	100	22	50	0,3	10	WZF 11278/10	< >
4	11,5	12	150	26	58	0,5	12	WZF 11278/12	< >
4	15,5	16	150	32	78	0,5	16	WZF 11278/16	< >
4	19,5	20	150	38	78	0,5	20	WZF 11278/20	< >




VALORI DI RIFERIMENTO PER LA SCANALATURA

WZF 11278	Materiale	Resistenza	Vc ¹ m/min.	d					
				6	8	10	12	16	20
				fz ² (mm/z)					
 <p>ae = 1 x d ap = 1 x d</p>	1.1730	640 N/mm ²	120	0.016	0.022	0.028	0.034	0.039	0.047
	1.2083	780 N/mm ²	80	0.008	0.010	0.013	0.016	0.020	0.022
	1.2085	1080 N/mm ²	80	0.008	0.010	0.013	0.016	0.020	0.022
	1.2162	660 N/mm ²	100	0.014	0.020	0.025	0.030	0.036	0.043
	1.2311	1080 N/mm ²	100	0.011	0.016	0.020	0.024	0.029	0.034
	1.2312	1080 N/mm ²	100	0.011	0.015	0.019	0.023	0.027	0.032
	1.2316	1010 N/mm ²	80	0.008	0.010	0.013	0.016	0.020	0.022
	1.2343	780 N/mm ²	100	0.014	0.020	0.025	0.030	0.036	0.043
	1.2379	780 N/mm ²	80	0.008	0.010	0.013	0.016	0.020	0.022
	1.2714HH	1350 N/mm ²	50	0.008	0.010	0.013	0.016	0.020	0.022
	1.2767	830 N/mm ²	100	0.014	0.019	0.024	0.029	0.034	0.041
	1.2842	775 N/mm ²	100	0.014	0.020	0.025	0.030	0.036	0.043
	Acciaio	1400 N/mm ²	50	0.008	0.010	0.013	0.016	0.020	0.022

VALORI DI RIFERIMENTO PER LA SGROSSATURA


WZF 11278	Materiale	Resistenza	Vc ¹ m/min.	d					
				6	8	10	12	16	20
				fz ² (mm/z)					
 <p>ae = 0.5 x d ap = 1 x d</p>	1.1730	640 N/mm ²	130	0.022	0.028	0.037	0.043	0.055	0.062
	1.2083	780 N/mm ²	90	0.010	0.014	0.017	0.021	0.025	0.030
	1.2085	1080 N/mm ²	90	0.010	0.014	0.017	0.021	0.025	0.030
	1.2162	660 N/mm ²	110	0.020	0.025	0.034	0.039	0.050	0.056
	1.2311	1080 N/mm ²	110	0.016	0.020	0.027	0.031	0.040	0.045
	1.2312	1080 N/mm ²	110	0.015	0.019	0.025	0.029	0.038	0.042
	1.2316	1010 N/mm ²	90	0.010	0.014	0.017	0.021	0.025	0.030
	1.2343	780 N/mm ²	110	0.020	0.025	0.034	0.039	0.050	0.056
	1.2379	780 N/mm ²	90	0.010	0.014	0.017	0.021	0.025	0.030
	1.2714HH	1350 N/mm ²	60	0.010	0.014	0.017	0.021	0.025	0.030
	1.2767	830 N/mm ²	110	0.019	0.024	0.032	0.037	0.048	0.053
	1.2842	775 N/mm ²	110	0.020	0.025	0.034	0.039	0.050	0.056
	Acciaio	1400 N/mm ²	60	0.010	0.014	0.017	0.021	0.025	0.030

VALORI DI RIFERIMENTO PER LA SGROSSATURA

WZF 11278	Materiale	Resistenza	Vc ¹ m/min.	d					
				6	8	10	12	16	20
				fz ² (mm/z)					
 <p>ae = 0.25 x d ap = 1 x d</p>	1.1730	640 N/mm ²	140	0.025	0.034	0.043	0.052	0.062	0.074
	1.2083	780 N/mm ²	100	0.012	0.017	0.022	0.026	0.031	0.037
	1.2085	1080 N/mm ²	100	0.012	0.017	0.022	0.026	0.031	0.037
	1.2162	660 N/mm ²	120	0.022	0.031	0.039	0.048	0.056	0.067
	1.2311	1080 N/mm ²	120	0.018	0.025	0.031	0.038	0.045	0.054
	1.2312	1080 N/mm ²	120	0.017	0.023	0.029	0.036	0.042	0.050
	1.2316	1010 N/mm ²	100	0.012	0.017	0.022	0.026	0.031	0.037
	1.2343	780 N/mm ²	120	0.022	0.031	0.039	0.048	0.056	0.067
	1.2379	780 N/mm ²	100	0.012	0.017	0.022	0.026	0.031	0.037
	1.2714HH	1350 N/mm ²	80	0.012	0.017	0.022	0.026	0.031	0.037
	1.2767	830 N/mm ²	120	0.021	0.029	0.037	0.045	0.053	0.064
	1.2842	775 N/mm ²	120	0.022	0.031	0.039	0.048	0.056	0.067
	Acciaio	1400 N/mm ²	80	0.012	0.017	0.022	0.026	0.031	0.037

1) Vc: Velocità di taglio (m/min.)

2) fz: Avanzamento per taglio (mm/z)

 Nel calcolatore dei parametri di taglio potete trovare altri materiali e valori di taglio