


**PRODUCT DESCRIPTION**

- » Simplifies the adjustment of slide units in injection moulds
- » Helps align the workpieces on surface grinding and milling machines
- » Ideal for adjusting the length of cutting punches and cutting dies in stamping dies

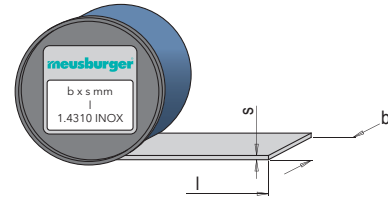

**MATERIAL**

- » 1.4310

s Tol. +/-	HRC	s	b	l	No.	#CU#
0.001	47	0.005	12.7	5	V 56044/0,005/ 12,7/ 5	XX,YY
0.002	47	0.01	12.7	5	V 56044/0,01 / 12,7/ 5	XX,YY
0.002	47	0.02	12.7	5	V 56044/0,02 / 12,7/ 5	XX,YY
0.003	47	0.03	12.7	5	V 56044/0,03 / 12,7/ 5	XX,YY
0.003	47	0.04	12.7	5	V 56044/0,04 / 12,7/ 5	XX,YY
0.003	47	0.05	12.7	5	V 56044/0,05 / 12,7/ 5	XX,YY
0.003	47	0.06	12.7	5	V 56044/0,06 / 12,7/ 5	XX,YY
0.004	47	0.07	12.7	5	V 56044/0,07 / 12,7/ 5	XX,YY
0.004	47	0.08	12.7	5	V 56044/0,08 / 12,7/ 5	XX,YY
0.004	47	0.09	12.7	5	V 56044/0,09 / 12,7/ 5	XX,YY
0.004	47	0.1	12.7	5	V 56044/0,10 / 12,7/ 5	XX,YY
0.004	47	0.12	12.7	5	V 56044/0,12 / 12,7/ 5	XX,YY
0.005	47	0.15	12.7	5	V 56044/0,15 / 12,7/ 5	XX,YY
0.006	47	0.2	12.7	5	V 56044/0,20 / 12,7/ 5	XX,YY

s Tol. +/-	HRC	s	b	l	No.	#CU#
0.007	47	0.25	12.7	5	V 56044/0,25 / 12,7/ 5	XX,YY
0.007	47	0.3	12.7	5	V 56044/0,30 / 12,7/ 5	XX,YY
0.008	47	0.35	12.7	5	V 56044/0,35 / 12,7/ 5	XX,YY
0.009	47	0.4	12.7	5	V 56044/0,40 / 12,7/ 5	XX,YY
0.009	47	0.45	12.7	5	V 56044/0,45 / 12,7/ 5	XX,YY
0.01	47	0.5	12.7	5	V 56044/0,50 / 12,7/ 5	XX,YY
0.01	47	0.6	12.7	5	V 56044/0,60 / 12,7/ 5	XX,YY
0.012	47	0.7	12.7	5	V 56044/0,70 / 12,7/ 5	XX,YY
0.013	47	0.8	12.7	5	V 56044/0,80 / 12,7/ 5	XX,YY
0.013	47	0.9	12.7	5	V 56044/0,90 / 12,7/ 5	XX,YY
0.018	47	1	12.7	5	V 56044/1,00 / 12,7/ 5	XX,YY
0.002	47	0.01	25	5	V 56044/0,01 / 25 / 5	XX,YY
0.002	47	0.02	25	5	V 56044/0,02 / 25 / 5	XX,YY